


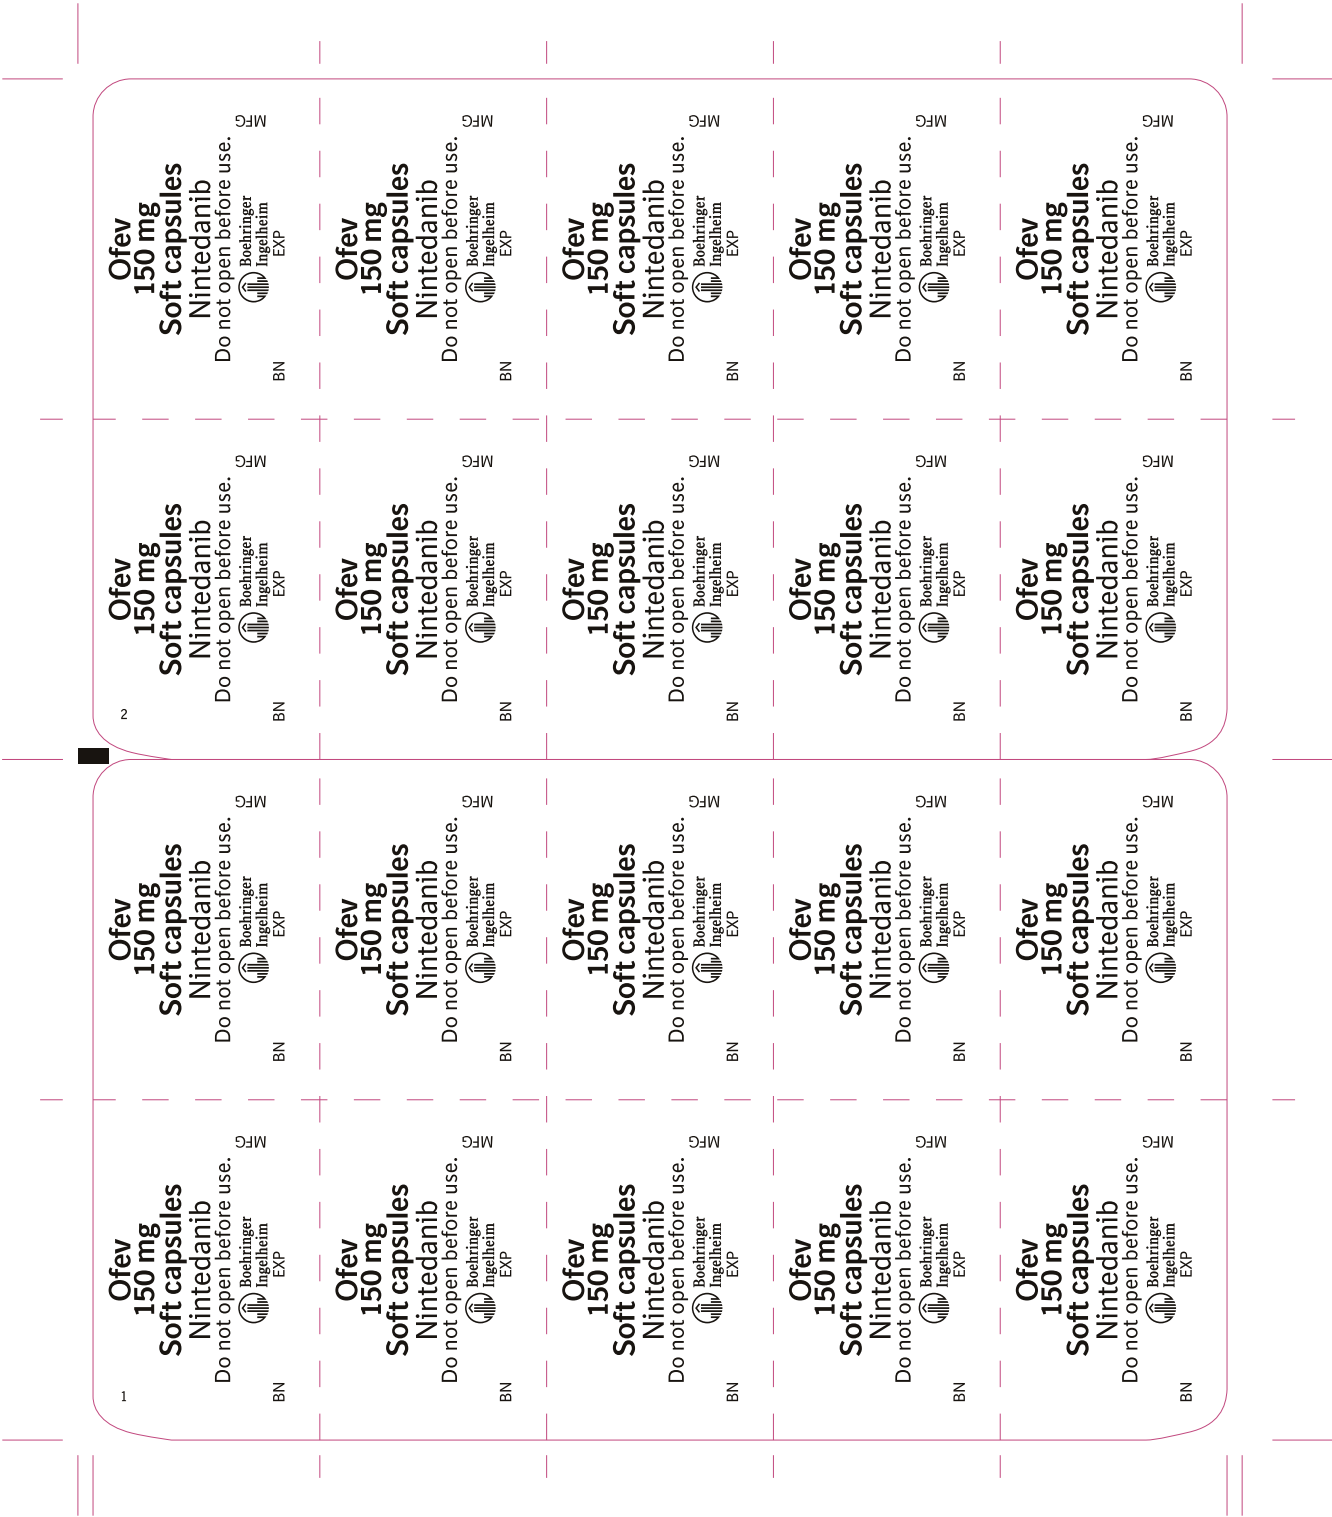

direction of travel

| File information       |                                                      | Mandatory in |           |
|------------------------|------------------------------------------------------|--------------|-----------|
|                        |                                                      | TD           | Printfile |
| Issue date of TD:      | 18.10.2023                                           | Yes          | Yes       |
| PPM SKU:               | P034875                                              | No           | Yes       |
| PPM SKU version:       | 002                                                  | No           | Yes       |
| Issue date of artwork: | 28/FEB/2024                                          | No           | Yes       |
| Print colors:          | PAN Black                                            | No           | Yes       |
|                        |                                                      |              |           |
|                        |                                                      |              |           |
| Mat. No. Pack. Site:   | 308142-02                                            | No           | Yes       |
| Min. font size:        | 6 pt.                                                |              |           |
| Legend case version:   | V5.0 01/JAN/2021 (please do not change or remove it) |              |           |

| Technical colours - not for printing |  |           |  |                      |  |
|--------------------------------------|--|-----------|--|----------------------|--|
| BI-Diecut-Legendcase                 |  | Free area |  | BI-Online data guide |  |

Variable data & coding information

|                              |                   |                        |                         |
|------------------------------|-------------------|------------------------|-------------------------|
| a = Batch number             | b = Expiry date   | c = Manufacturing date | d = Price/Sample/Clinic |
| e = GTIN, NTIN, Product Code | f = Serial number | -                      | -                       |

Example for guidance only. Format of date, prefixes and code content in accordance with valid DaCoR version.

Prefix c  
MM YYYY

Prefix b  
MM YYYY

Prefix a  
123456

All prefixes included to the artwork  
If prefix C is not necessary, please delete.

| Additional Requirements of Packaging site                                                                                                                                                                      |            |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Template name: BM_154x180_B150x90                                                                                                                                                                              | Index: 4.0 |
| All elements in “Color 1” have to be changed in to black.<br>direction of travel (3 arrows)<br>register mark<br>stop mark<br>serial number on blister                                                          |            |
| Only for BI-internal use and for Component Supplier:<br>Template according to Drawing no.: SP-17-0028-001-B_Index_i (Variant 2)<br>Late Stage Customization according to Drawing no.: SP-17-0028-002-B_Index_a |            |
| Mat. No. Pack. Site not required on artwork.Only includet to the legend case.                                                                                                                                  |            |
| Please note the following specification regarding line thickness and distances between lines and elements for creation of Artwork.                                                                             |            |



- a** Minimum line thickness of 0,12mm/  
or minimum distance of 0,12mm
- b** Minimum line thickness of 0,10mm/  
or minimum distance of 0,10mm
- c** Minimum line thickness can be ignored for serifs and pointed/tapered elements